



# KFS-0840



## Industrial 8-Port L2 Fast Ethernet Switch

DIN-Rail Mounting



Panel Mounting Bracket  
PMB-0540



### Key Features:

- Auto MDI/MDI-X crossover function on the TP copper port
- Support IEEE 802.3x flow control for full-duplex operation
- Support Back-pressure flow control for half-duplex operation
- Wide operating temperature range for temperature critical environment
- Support DIN-Rail mounting and panel mounting
- Provide two power input types to meet more application needs
- Accept wide power input voltage range for application flexibility
- Industrial-rated Emission and Immunity performance
- Power saving mode for port link down
- Broadcast storm protection

### Specifications:

Standard	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX std.
Network Ports	8 10/100 Fast Ethernet copper ports Shielded RJ-45 jacks with auto-negotiation, auto-MDI/MDI-X support
Flow control	IEEE 802.3x pause packet for full-duplex operation Back-pressure for half-duplex operation
Cables	10Base-T: Cat. 3, 4, 5 or higher (100 meters max.) 100Base-TX: Cat. 5, 5e or higher (100 meters max.)
LEDs	Power status, Port link/activity status, Port speed status
Forwarding rate	10Base-T: 10Mbps (Half-duplex) 20Mbps (Full-duplex) 100Base-TX: 100Mbps (Half-duplex) 200Mbps (Full-duplex)
Packet Size	Up to 1536 bytes
Environment	Operating Temperature: -35°C ~ 70°C Storage Temperature: -40°C ~ 85°C Relative Humidity: 10% ~ 90% non-condensing
Dimensions	40 x 80 x 95 mm (WxDxH)
DC Power Input	Screwed terminal block DC jack: -D 6.3mm/+D 2.0mm Operating voltage range: +7V ~ +30VDC
Power Consumption	2.3W max.
Housing	Enclosed metal with no fan
Mounting Support	DIN-Rail, Wall, Panel mounting (optional)
Approval	FCC Class A, CE mark Class A, LVD IEC 60950-1 safety

#### EMI EMS Safety Environmental Tests:

Test	Standard	Specifications
FCC/EMI	FCC Rule Part 15	Class A
CE/EMC/EMI	EN55022, CISPR 22	Class A
CE/EMC/Harmonic	EN 61000-3-2	< 75 W
CE/EMC/VFF	EN 61000-3-3	Clause 5
CE/EMC/EMS	EN 55024	
ESD Test	IEC 61000-4-2	Contact: +/-4KV Air: +/-8KV
RS Test	IEC 61000-4-3	Strength: 10V/m
EFT/BURST	IEC 61000-4-4	DC IN: +/-0.5KV RJ-45: +/-1KV
Surge	IEC 61000-4-5	DC IN: +/-0.5KV RJ-45: +/-1KV
CS Test	IEC 61000-4-6	Level 3
Magnetic Field Imm.	IEC 61000-4-8	50Hz 100A/m
Voltage Dips Imm.	IEC 61000-4-11	Interruption: C Dips: B
Safety	IEC 60950-1	
Dielectric Voltage	IEEE 802.3	TP, 1500VAC/60sec.
Insulation Resistance	IEEE 802.3	TP, 500VDC/10Mohm
Cold Test	IEC 60068-2-1 Ad	-35°C, 96hrs
Dry Heat Test	IEC 60068-2-2 Bd	+70°C, 40%RH, 96hrs
Damp Heat Test	IEC 60068-2-3 Ca	+60°C, 90%RH, 96hrs
Storage Test	IEC 60068-2-4B	-40°C, 96hrs +90°C, 95%RH, 96hrs
Vibration Test	IEC 60068-2-64 Fh	10-200Hz, 0.1g <sup>2</sup> /Hz 200-500Hz, 0.03g <sup>2</sup> /Hz
Shock Test	IEC 60068-2-27 Ea	50G


#### Optional Accessories:

KPW-1212-H-V	AC Power adapters for high temperature 60°C for Europe, Input 100 ~ 240VAC, Output 12VDC/1A, 12Watts
KPW-1212-H-U	AC Power adapters for high temperature 60°C for USA, Input 100 ~ 240VAC, Output 12VDC/1A, 12Watts
KPW-2012-D-E	DIN-Rail Power Supply, Input 100 ~ 240VAC, Output 12VDC/1.8A, 21.6Watts -20°C ~ 60°C
KPW-2024-D	DIN-Rail Power Supply, Input 100 ~ 240VAC, Output 24VDC/0.9A, 21.6Watts -25°C ~ 70°C
KPW-1012-D	DIN-Rail Power Supply, Input 100 ~ 240VAC, Output 12VDC/0.85A, 10.2Watts -40°C ~ 70°C
PMB-0540	Panel mounting kit for KFS-0840



**Katron Technologies Inc.**  
 15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,  
 Hsi-chih District, New Taipei City, Taiwan  
 Tel: 886-2-2698-3878  
 Fax: 886-2-2698-3873  
 E-mail: kti@ktinet.com.tw  
 URL: http://www.ktinet.com.tw

Trademarks: All brand names are trademarks or registered trademarks of their respective holders.  
 This information is subject to change without prior notice.

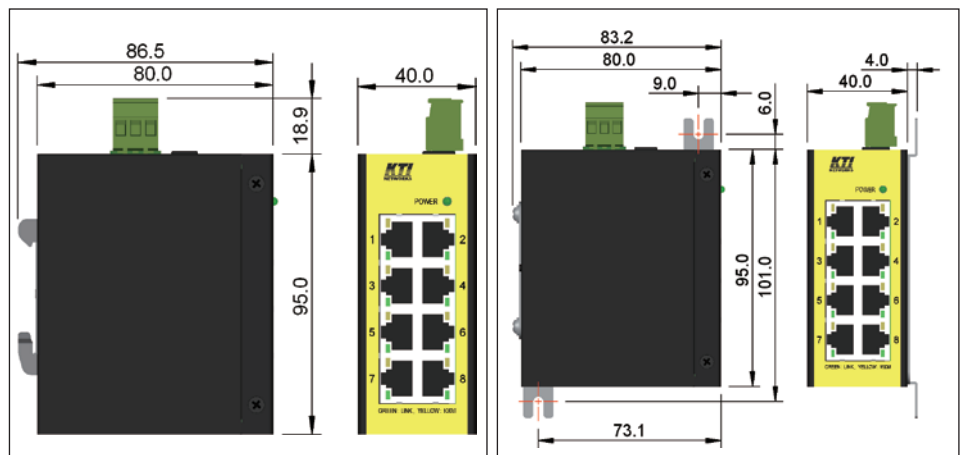

DIN-Rail Dimension

Panel Dimension