



KPW-2012-D-E



DIN-Rail AC-DC 12V Power Supply

DIN-Rail Mounting



Panel Mounting Bracket
C03-4017-101 (KCD-4PB)



Key Features:

- Universal AC input/Full range
- Dual types of input interfaces:
 - Typical IEC320 AC socket for commercial installation
 - Industrial Terminal block connector for industrial installations
- Dual types of DC output interfaces:
 - 2 pairs of industrial Terminal block connectors for industrial installations
 - Typical DC plug support for commercial installation
- No load power consumption < 0.75W
- Protections: Short circuit/Overload/Over voltage
- UL60601-1/IEC60601-1/EN60601-1 safety approved internal Power Module
- IEC60950-1 safety approved for Power Supply

Specifications:

AC Input voltage	100 ~ 240VAC
DC Output voltage	+12V (+/-5%), 1.8A max.
Input connectors	IEC320 C14 socket Terminal block 3P: L/N/PE
Output connectors	Terminal block 4P (2 pairs): Vout+/Vout-/Vout+/Vout- DC plug cable for Device's DC jack interface
LEDs	Power status
Mounting Support	DIN-Rail, Wall, Panel, Desktop
Protection	Short circuit, Overload, Over voltage
Environment	Operating Temperature: -20°C ~ 60°C Power Load: 100%@-20°C ~ 50°C, 50%@60°C Storage Temperature: -30°C ~ 85°C
Dimensions	40 x 80 x 95 mm (WxDxH)
Internal Power Module	UL60601-1, IEC60601-1, TUV EN60601-1 Certified
MTBF	400K Hours
Approval	LVD, IEC60950-1, FCC Class A, CE Class A




EMI EMS Safety Environmental Tests:


Test	Standard	Specifications
FCC/EMI	FCC Rule Part 15	Class A
CE/EMC/EMI	EN55022, CISPR 22	Class A
CE/EMC/Harmonic	EN 61000-3-2	< 75 W
CE/EMC/VFF	EN 61000-3-3	Clause 5
CE/EMC/EMS	EN 55024	
ESD Test	IEC 61000-4-2	Contact: +/-8kV Air: +/-16kV
RS Test	IEC 61000-4-3	Strength: 10V/m
EFT/BURST	IEC 61000-4-4	Line-Line: 2kV Line-Ground: 4kV
Surge Immunity	IEC 61000-4-5	Line-Line: 2kV Line-Ground: 4kV
CS Test	IEC 61000-4-6	Level 3
Magnetic Field Imm.	IEC 61000-4-8	50Hz 100A/m
Voltage Dips Imm.	IEC 61000-4-11	Interrupt 95%: C Dips 95%: B
Safety	EN 60950, IEC 60950	
Dielectric Voltage	IEEE 802.3	TP, 1500VAC/60sec.
Insulation Resistance	IEEE 802.3	TP, 500VDC/10Mohm
Cold Test	IEC 68-2-1 Test Ad	-20°C, 96hrs
Dry Heat Test	IEC 68-2-2 Test Bd	+60°C 42%RH 96hrs
Damp Heat Test	IEC 68-2-3	+60°C 90%RH 96hrs
Storage Test	IEC 68-2-48	-20°C 96hrs +90°C 95%RH 96hrs
NEMA TS2 Vibration test	NEMA TS2-2003 Proc. 2.2.8.3-4	5-30Hz, 0.5g XYZ, 1hr/axis

Optional Accessories:

KCD-4PB Panel mounting kit for KFS-0540, KFS-0840, KPW-2012-D

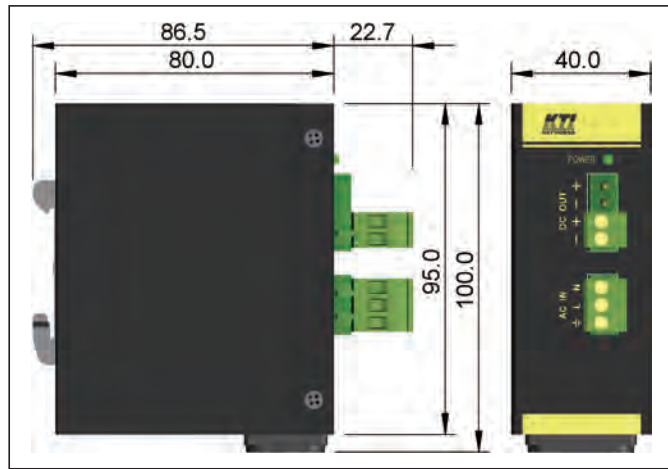

DIN-Rail Dimension

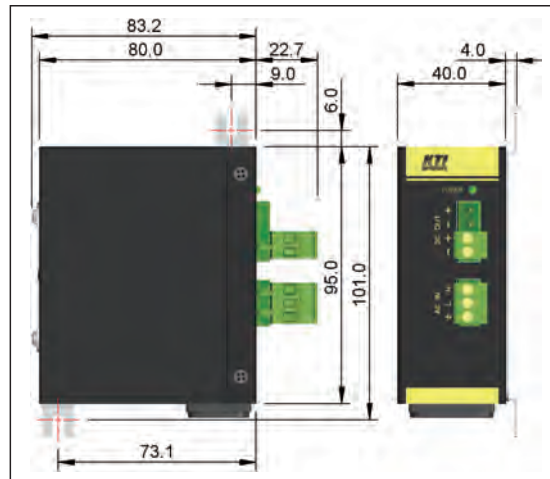

Panel Dimension



AC power cord + KPW-2012-D-E + DC plug cable + KGS-810F



FCC Part 15, Class A
CISPR 22 Class A

Katron Technologies Inc.

15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
Hsi-chih, Taipei Hsien, Taiwan.
Tel: 886-2-2698-3878
Fax: 886-2-2698-3873
E-mail: kti@ktinet.com.tw
URL: http://www.ktinet.com.tw

KTI Networks Inc.

10415-A Westpark Drive, Houston,
TX 77042. U.S.A.
Tel: 1-713-266-3891
Fax: 1-713-914-0555
E-mail: contact@ktinet.com
URL: http://www.ktinet.com

Trademarks: All brand names are trademarks or registered trademarks of their respective holders. This information is subject to change without prior notice.