KCD-303P-A / KCD-303P-B

Industrial 3-Port Fast Ethernet POF Media Converter Switches





Specifications





KCD-303P-A	2 copper ports and 1 POF port
KCD-303P-B	1 copper port and 2 POF ports

Copper Port

- 10/100 Mbps RJ-45 support
- Auto-negotiation, Auto-MDI/MDI-X
- 802.3x flow control


POF Port

- 100 Mbps full duplex
- 1.5mm or 2.2mm POF cable support
- 50 meters typical distance
- * Operating Temperature 0 ~ +70°C
- * Industrial-rated EMC


Advantage 1: POF Cables

Benefits

- Low cost
- Weight little
- Thin, but rugged
- Home friendly
- Easy to install
- Save to install
- Electronic noise immunity
- 1.5mm/2.2mm support

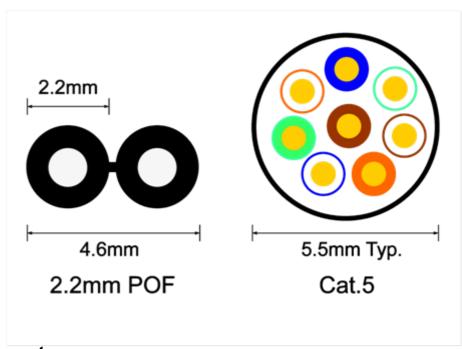

Advantage 2: Easy POF Installation

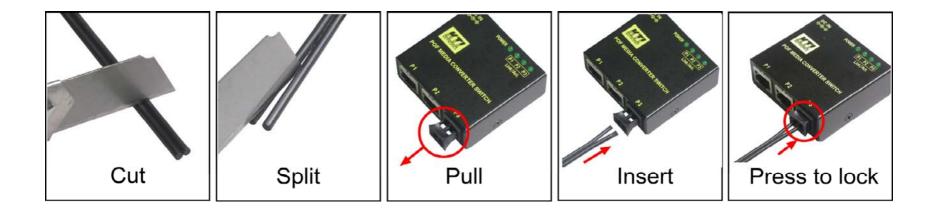

Benefit 1: Power Interfaces

DC power input from Power adapter DC power input via USB connection






Power options:


- Commercial type : 0 ~ 40°C
- High temperature rating type : -10 ~ 60°C

Benefit 2: Mounting Flexibility


Wall Mounting Panel Mounting Din-Rail Mounting

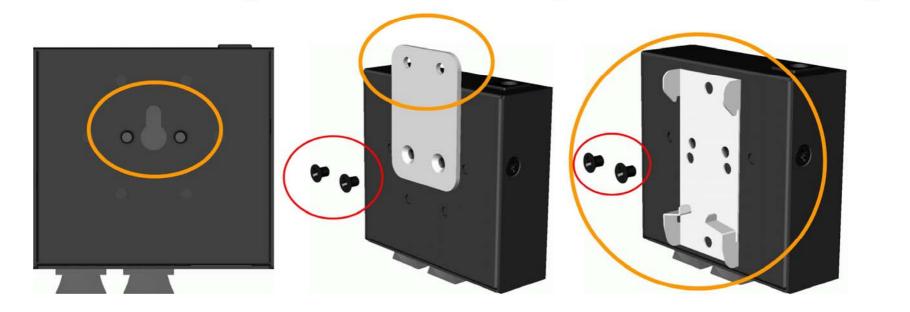

Application 1: Industrial Networks

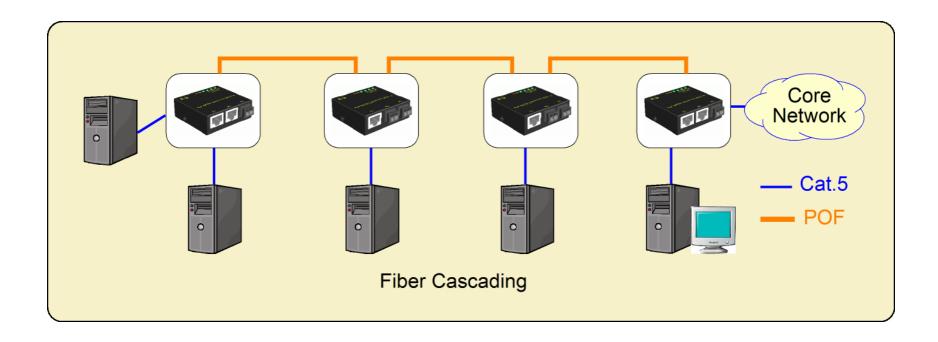

Application 2: Home Network

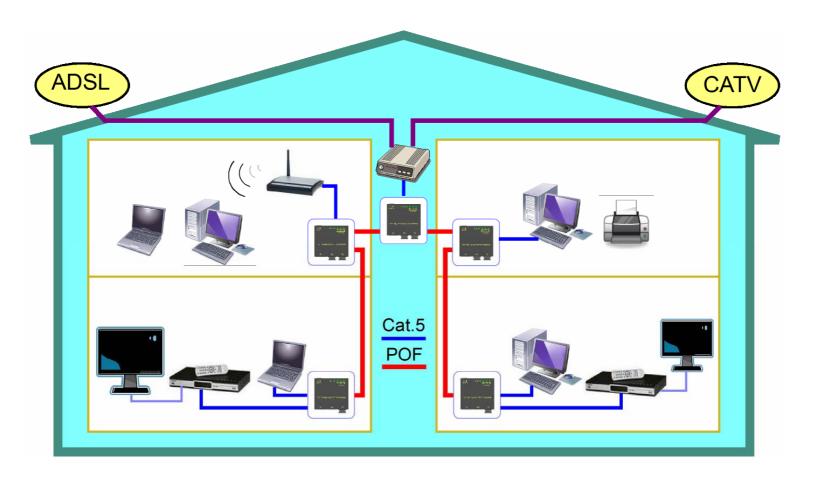

Application 3: Media Converter

