

KP-1001 Ver. B, KPG-4010, KP-4010 Print Server Technical Notes


IPX Printer Status. Upon completion of KTI Print Server Wizard, a reboot of Windows system is necessary to enable reflection of correct IPX network printer status.

Winodws 98 and Windows Me Installation. When both the Windows 98/Me system and the Print Server are in DHCP mode, please follow the instruction described in the **LPR.pdf** in the **Manual** folder in the CD enclosed alone with the Print Server package.

Deliver of print error e-Mail message. There are two sections in the configuration interface need to be attended in order to allow successful deliver of error message to e-Mail account. These sections are:

1. “E-mail Account” in the E-mail tab
2. DNS server IP address under the Network tab

These two configurations are shown as below, and please enter related information in both sections to enable email delivery of error messages.

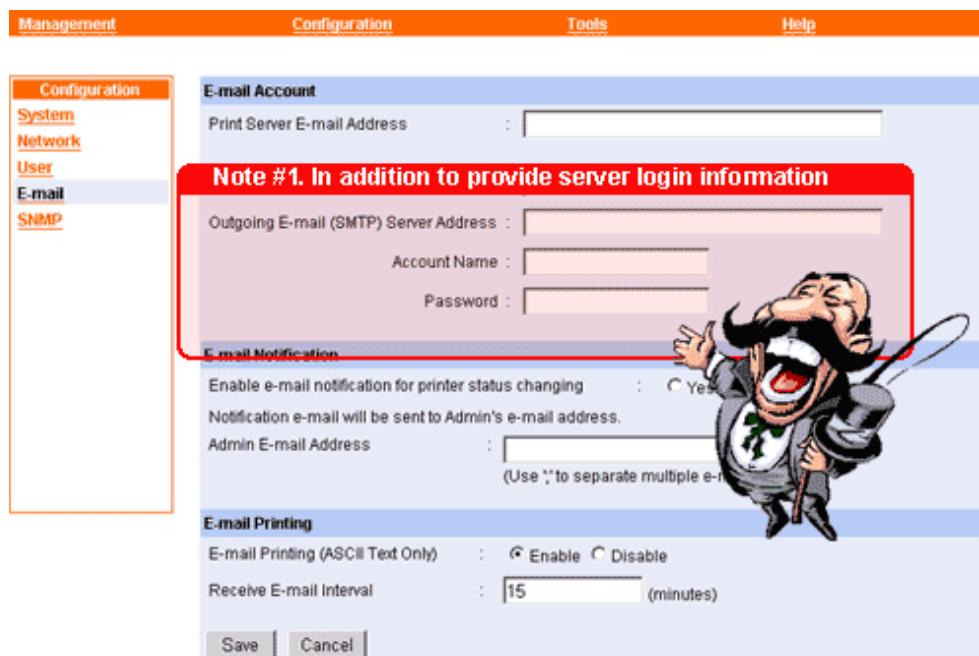

Management Configuration Tools Help

Configuration

System

Network

User E-mail SNMP

TCP/IP

IP Address : Manually Assign

IP Address : 192.168.0.1

Subnet Mask : 255.255.255.0

Default Gateway : 0.0.0.0

IP address of DNS Server is needed

DNS Server Address : 1. 0.0.0
2. 0.0.0

UPnP : Enable Disable

MAC Render : Enable Disable

Second HTTP : Enable Disable

Port Number : 0
(For Remote Web Configuration and IPP Printing)

Microsoft Network

