



KFC-200




Product Highlights:

- Compact
- Plug and play
- Auto-negotiation 10/100Mbps
- Auto-crossover
- Fiber Far End Fault

Ordering Information:

Model	Fiber Mode	Connector	Ref. Distance
-T	MM	Duplex ST	2km
-C	MM	Duplex SC	2km
-SL2	SM	Duplex SC	20km
-SL3	SM	Duplex SC	30km
-W3520	SM	Bi-Di SC	20km
-W5320	SM	Bi-Di SC	20km

MM: Multimode Fiber
SM: Single Mode Fiber

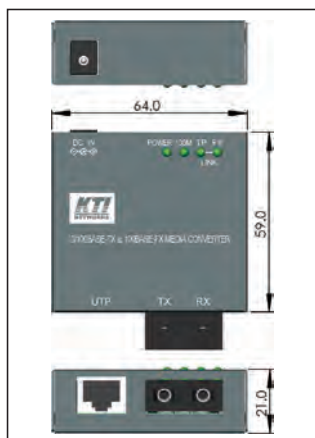

FCC Part 15, Class B
CISPR 22 Class B

Katron Technologies Inc.

15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
Hsi-chih District, New Taipei City, Taiwan
Tel: 886-2-2698-3878
Fax: 886-2-2698-3873
E-mail: kti@ktinet.com.tw
URL: http://www.ktinet.com.tw

KTI Networks Inc.

10415-A Westpark Drive, Houston,
TX 77042. U.S.A.
Tel: 1-713-266-3891
Fax: 1-713-914-0555
E-mail: contact@ktinet.com
URL: http://www.ktinet.com

Trademarks: All brand names are trademarks or registered trademarks of their respective holders.
OptoLock™ is a registered trademark of Firecomms Ltd.
This information is subject to change without prior notice.

10/100BASE-TX to 100BASE-FX Media Converter

Key Features:

- Support full wire speed conversion for 10/100Mbps speed and media types
- Support auto-negotiation 10/100Mbps or forced mode on the copper port
- Auto MDI/MDI-X crossover function on the copper port
- Support IEEE 802.3x flow control
- Transparent conversion to 802.1Q VLAN tagged packets
- Provides Far End Fault function on FX (fiber) port
- Low power consumption
- Supports DIN rail mounting and wall mounting

Specifications:

TP Port	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX Shielded RJ-45 jacks with Auto MDI/MDI-X detection Auto-negotiation for speed and duplex auto detection Speed for 10Mbps or 100Mbps, Full-duplex or half-duplex support
FX Port	IEEE 802.3u 100BASE-FX compliant Forced 100Mbps, Full duplex Far end fault Function
Cables	10/100BASE-TX: Cat.5, 5e or higher UTP cable, 100BASE-FX: MMF - 62.5/125µm, 50/125µm, SMF - 9 /125µm
LEDs	TP speed, Link/Activity, Power status
Packet Size	Up to 1536 bytes
Environment	Operating Temperature: 0°C ~ 50°C Storage Temperature: -30°C ~ 80°C Relative Humidity: 5% ~ 95% non-condensing
Dimension	64 x 59 x 21 mm (WxDxH)
Mounting Support	Optional: DIN-Rail, panel, wall mounting
Power Input	+3.3VDC via external power adapter
Power Consumption	1.8W max. @+3.3V
Approval	FCC Class B, CE Class B

Optical Specifications:

Model	Connector	Fiber	Wavelength	Tx Power	Rx Sens.	Rx Max.
-T	Duplex ST	MMF	1310nm	-20 ~ -14dBm	-32dBm	-8dBm
-C	Duplex SC	MMF	1310nm	-20 ~ -14dBm	-31dBm	0dBm
-SL2	Duplex SC	SMF	1310nm	-15 ~ -8dBm	-30dBm	-7dBm
-SL3	Duplex SC	SMF	1310nm	-15 ~ -8dBm	-34dBm	0dBm
-W3520	Bi-Di SC	SMF	TX 1310nm RX 1550nm	-14 ~ -8dBm	-31dBm	0dBm
-W5320	Bi-Di SC	SMF	TX 1550nm RX 1310nm	-14 ~ -8dBm	-31dBm	0dBm

MMF: Multimode fiber - 62.5/125 µm, 50/125 µm
SMF: Single Mode fiber - 9 /125 µm