



KGD-600



Industrial Managed 6-Port L2 Gigabit Ethernet Switch with 1 GbE SFP Port

Product Highlights:

- Panel/DIN-Rail/Wall mountable
- Wide operating temperature range
- In-band management
- Optional Fiber connectivity
- 802.1Q Tagged VLAN support
- QoS WFQ support
- 802.1x authentication
- Compact design

Panel Mounting



DIN-Rail Mounting



Top LED Display



Key Features :

- Provides 5 10/100/1000Mbps Gigabit Ethernet ports and 1 mini-GBIC port
- Provides in-band web-based management interface
- All copper ports support auto-negotiation and auto-MDI/MDI-X detection
- Supports 802.3x flow control for full-duplex and backpressure for half-duplex
- Provides port status, statistic monitoring and control function
- Provides full wire speed forwarding
- Supports port-based and 802.1Q Tag-based VLAN
- Provides QoS function
- Provides 802.1x authentication
- Supports configuration backup and upload
- Provides port mirroring function
- Provides redundant ring function
- Industrial-rated emission and immunity performance

Specifications:

Standard	IEEE 802.3, 802.3u, 802.3ab, 802.3x, 802.1Q
Network Ports	5 10/100/1000Mbps Gigabit copper ports Shielded RJ-45, auto-negotiation, auto-MDI/MDI-X support 1 1000Mbps mini-GBIC SFP port SFP supports standard SFP fiber transceiver installation
Network Cables	10/100Mbps: Cat.5 up to 100m, 1000Mbps: Cat.5e or higher up to 100m
MAC Address Table	8K entries
Buffer Memory	112KB
VLAN	Port based VLAN, 8021Q Tag-based VLAN
Port Link Aggregation	Trunking groups: 2 max., Ports/group: 2
QoS	4 priority queues, Classification: Port-based, 802.1p, IP DSCP
LED Indication	Display on both top and front panels Per unit: power Per copper port: 1000M, 100M, 10M speed/link/activity status SFP port: 1000M speed/link/activity status, Optical link status
Management Support	Web browser software, management VLAN ID
Management Objects	System settings, port status/statistics, port control, VLAN, QoS, 802.1x, port mirroring, Firmware upgrade
DC Power Input	Screwed Terminal Block: +6.5VDC ~ +32VDC DC IN Jack: -D 6.3mm/+D 2.0mm External power adapter rating: +6.5VDC ~ +32VDC
Power Consumption	5W max. @+7.5V input



Power Terminal Block



EMI EMS Safety Environmental Tests:

Test	Standard	Specifications
FCC/EMI	FCC Rule Part 15	Class B
CE/EMC/EMI	EN55022, CISPR 22	Class B
CE/EMC/Harmonic	EN 61000-3-2	< 75 W
CE/EMC/VFF	EN 61000-3-3	Clause 5
CE/EMC/EMS	EN 55024	
ESD Test	IEC 61000-4-2	Contact: +/-8KV Air: +/-16KV
RS Test	IEC 61000-4-3	Strength:10V/m
EFT/BURST	IEC 61000-4-4	+/-4KV
Surge Immunity	IEC 61000-4-5	Power:4KV
CS Test	IEC 61000-4-6	Level 3
Magnetic Field Imm.	IEC 61000-4-8	50Hz 40A/m
Voltage Dips Imm.	IEC 61000-4-11	Interruption: C Dips: B
Safety	EN 60950, IEC 60950	
Dielectric Voltage	IEEE 802.3	TP, 1500VAC/60sec.
Insulation Resistance	IEEE 802.3	TP, 500VDC/10Mohm
Cold Test	IEC 68-2-1 Test Ad	-20°C, 96hrs
Dry Heat Test	IEC 68-2-2 Test Bd	+74°C 40%RH 96hrs
Damp Heat Test	IEC 68-2-3	+60°C 90%RH 96hrs
Storage Test	IEC 68-2-48	-20°C 96hrs +85°C 40%RH 96hrs
Vibration Test	IEC 68-2-34	5-30Hz, 0.5g Operating
NEMA TS2 Vibration test	NEMA TS2-2003 Proc. 2.2.8.3-4	5-30Hz, 0.5g xYz, 1hr/axis
NEMA TS2 Shock test	NEMA TS2-2003 Proc. 2.2.9	Half-sine pulse 10g, 11ms, ±XYZ
NEMA TS2 Environment test	NEMA TS2-2003 Proc. 2.2.7.3-6	Temp: -34-74°C Humid: 0%-90% Power: +6.5V-30V



FCC Part 15, Class A
CISPR 22 Class A

Katron Technologies Inc.

15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
Hsi-chih District, New Taipei City, Taiwan
Fax: 886-2-2698-3873
E-mail: kti@ktinet.com.tw
URL: http://www.ktinet.com.tw

KTI Networks Inc.

10415-A Westpark Drive, Houston,
TX 77042. U.S.A.
Tel: 1-713-266-3891
Fax: 1-713-914-0555
E-mail: contact@ktinet.com
URL: http://www.ktinet.com


Trademarks: All brand names are trademarks or registered
trademarks of their respective holders.
This information is subject to change without prior notice.

Dimension	144 x 104.5 x 26 mm (WxDxH)
Housing	Enclosed metal with no fan
Mounting Support	Screw Panel Mounting, DIN-Rail Mounting, Wall/Desktop Mounting
Environment	Operating Temperature: -20°C ~ 70°C (Main device) Storage Temperature: -20°C ~ 85°C Relative Humidity: 10% ~ 90% non-condensing
Approval	FCC Class A CE mark/EMC Class A EN60950/IEC60950-1 safety NEMA TS2-2003 Environment tests


Fiber Optical Specifications:

Model	Connector	Fiber	Wavelength	Tx Power*	Rx Sens.	Rx Max.	Distance
-SX	LC	62.5/125 MMF 50/125 MMF	850nm	-9.5 ~ -4dBm	-18dBm	0dBm	200m 500m
-LX	LC	MMF SMF	1310nm	-9.5 ~ -3dBm	-20dBm	-3dBm	550m 10km
-LX20	LC	SMF	1310nm	-8 ~ -2dBm	-23dBm	-1dBm	20km

* Data for 62.5/125µm MMF, 9 /125µm SMF

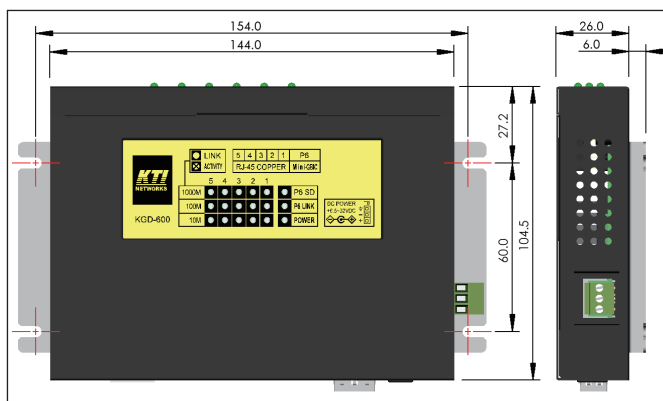

Panel Dimension

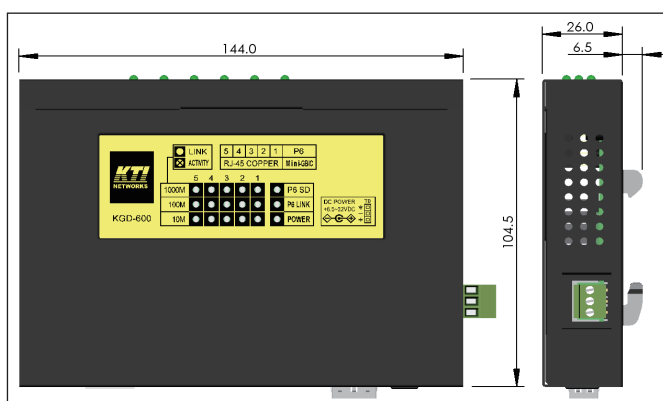

DIN-Rail Dimension