




KGS-510F Ver.D

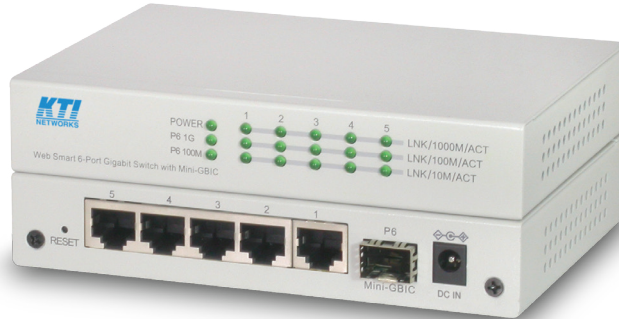

Managed 6-Port L2 Gigabit Ethernet Switches with 1 dual-speed SFP Slot

Product Highlights:

- Compact design
- Web, telnet, SNMP managed
- SFP dual speed support
- IPv6 support
- RSTP, STP, MSTP support
- IGMP & MLD snooping
- OPA function
- ALS function
- Powerful management support

Key Features:

- 5 10/100/1000Mbps RJ-45 and one dual-speed SFP slot
- All copper ports support auto-negotiation and auto-MDI/MDI-X detection
- The SFP slot supports dual speed for 100BASE-FX and 1000BASE-X SFP transceivers
- Full wire speed forwarding
- Support 802.3x flow control for full-duplex and backpressure for half-duplex
- Support SFP with Digital Diagnostic Monitoring (DDM)
- Provide Automatic Laser Shutdown (ALS) function
- Provide fiber optical power Alarm (OPA) function
- Alarm e-mail notification

Management Features:

- Management:
 - HTTP/HTTPS/SSHv2/CLI telnet/SNMP v1/v2c/v3/RMON
 - DHCP/DHCPv6 client, DNS client, NTPv4
 - IPv6 support, System Syslog, Configuration download/upload, Software upload
 - KTI's private MIB for DDM monitoring, OPA, ALS, Remote boot, TFTP firmware update over SNMP
- Security:
 - NAS, 802.1X, MAC-based/Web/CLI authentication
 - IP MAC binding, TACACS+, IP source guard
- Layer 2:
 - QoS, 802.1Q/Private VLAN, Port Isolation
 - Storm control for UC/MC/BC packets
 - Static MAC configuration
 - IGMP v2/v3 snooping, MLD v1/v2 snooping, DHCP snooping
 - Multiple Spanning Tree – MSTP, RSTP, STP

Specifications:

Standard	IEEE 802.3, 802.3ab, 802.3z, 802.3x, 802.1x, 802.1w, 802.1D, 802.1Q
Network Ports	5 10/100/1000Mbps Gigabit copper ports 1 1G/100Mbps SFP slot
Copper Port	Shielded RJ-45, 10/100/1000Mbps, auto-negotiation, auto-MDI/MDI-X support
Mini-GBIC SFP	SFP connector Interface: 1000BASE-X and 100BASE-FX support
Network Cables	10/100/1000Mbps copper: Cat.5 up to 100m 1000Base-X: 62.5/125µm, 50/125µm MM fiber, 9/125µm SM fiber
MAC Addresses	Table with 8K entries
Buffer Memory	4Mbits



Optional Accessories:


WMK5	Wall mounting kit
KTI quality SFP transceivers	

LED Indication	Per unit: Power Per port: Speed/link/activity status SFP port: Speed, Link/activity status
Power Input	DC jack, Voltage range: +5 ~ +30VDC via external power adapter
Power Consumption	5.4W max. @12VDC (DC IN)
Housing	Enclosed metal with no fan
Dimension	144 x 104.5 x 26 mm (WxDxH)
Mounting Support	Desktop and wall mounting
Environment	Operating Temperature: -10°C ~ 45°C (Main device) Storage Temperature: -40°C ~ 85°C Relative Humidity: 5% ~ 95% non-condensing
Approval	FCC Class A, CE mark Class A, VCCI Class A, IEC60950-1 safety

Fiber Optical Specifications:

Model	Connector	Fiber	Wavelength	Tx Power*	Rx Sens.	Rx Max.	Distance
-SX	LC	62.5/125 MMF 50/125 MMF	850nm	-9.5 ~ -4dBm	-18dBm	0dBm	200m 500m
-LX	LC	MMF SMF	1310nm	-9.5 ~ -3dBm	-20dBm	-3dBm	550m 10km
-LX20	LC	SMF	1310nm	-8 ~ -2dBm	-23dBm	-1dBm	20km
-LX30	LC	SMF	1310nm	-4 ~ +1dBm	-24dBm	-3dBm	30km
-LX50	LC	SMF	1550nm	-4 ~ +1dBm	-24dBm	-3dBm	50km
-LX70	LC	SMF	1550nm	0 ~ +5dBm	-24dBm	-3dBm	70km
-W3510	Bi-Di LC	SMF	Tx 1310nm Rx 1550nm	-9 ~ -3dBm	-21dBm	-1dBm	10km
-W5310	Bi-Di LC	SMF	Tx 1550nm Rx 1310nm	-9 ~ -3dBm	-21dBm	-1dBm	10km
-W3520	Bi-Di LC	SMF	Tx 1310nm Rx 1550nm	-8 ~ -3dBm	-23dBm	-1dBm	20km
-W5320	Bi-Di LC	SMF	Tx 1550nm Rx 1310nm	-8 ~ -3dBm	-23dBm	-1dBm	20km
-W3410	Bi-Di LC	SMF	Tx 1310nm Rx 1490nm	-9 ~ -3dBm	-21dBm	-1dBm	10km
-W4310	Bi-Di LC	SMF	Tx 1490nm Rx 1310nm	-9 ~ -3dBm	-21dBm	-1dBm	10km

*Data for 62.5/125µm MMF, 9 /125µm SMF

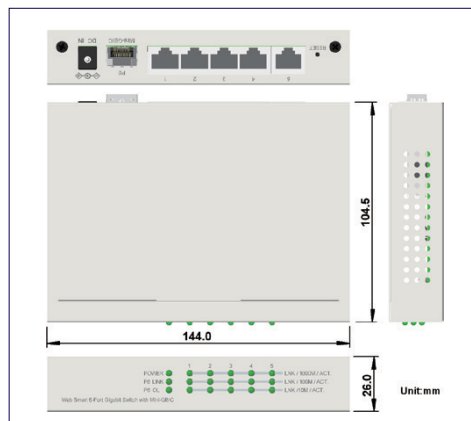

Dimension



Katron Technologies Inc.
15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
Hsi-chih District, New Taipei City, Taiwan
Tel: 886-2-2698-3878
Fax: 886-2-2698-3873
E-mail: kti@ktinet.com.tw
URL: <http://www.ktinet.com.tw>

Trademarks: All brand names are trademarks or registered trademarks of their respective holders. This information is subject to change without prior notice.